

序号/revmo.	名称 /Title	文件编号 /File No.
1	103中盖	
2	103反折盖	
3	103后盖	
4	103M塑件主体	
5	103M端子	
6	铁壳	

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resistance: 1000MΩ min.at DC 500V

Current Rating: 5AMP




Dielectric Withstanding

Voltage: AC 500V For 1 minute

Operating Temperature: -55℃--+105℃

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

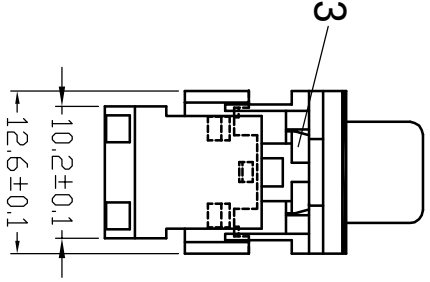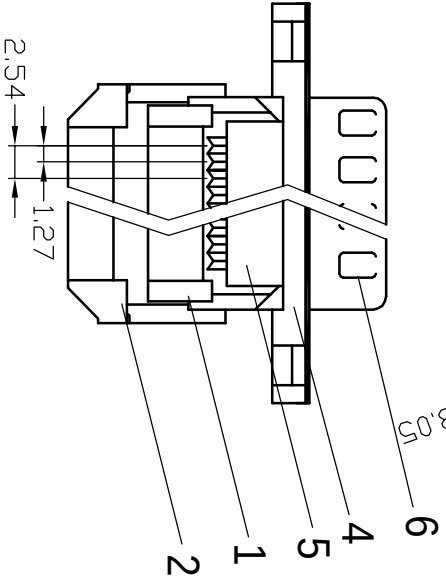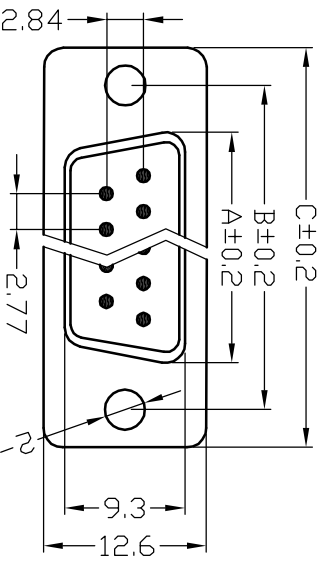

Position	A	B	C
9	17.78	24.99	30.81
15	26.15	33.32	39.20
25	39.94	47.04	53.10
37	56.56	63.50	69.50

设计/Designed by	绘图/Drawning by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				X: ±0.2 .X: ±0.1 .XX: ±0.05 .xxx: ±0.01
图名/Title				X: ±2° .X: ±1° .XX: ±0.5° .xxx: ±0.5°
文件编号/File No.				
页序/Sheet				
备注/Remark				单位/Units: mm

XINYA ELECTRONIC CO.,LTD

新亚电子

103M-A 产品图