
## Single phase regulating autotransformers

Open built autotransformers for non-step input voltage regulation in electrical instalation and devices. Protection grade IPOO. Maximum ambient temperature 45°C. Panel montage destination. Manufactured in compliance with EN61558-1, EN61558-2-14.

Input voltage	:230 V
Outpuy voltage	:0 - 260 V
Frequency	:50 - 300 Hz
Output current	:1A, 2.8A, 5A, 6.5A, 12A

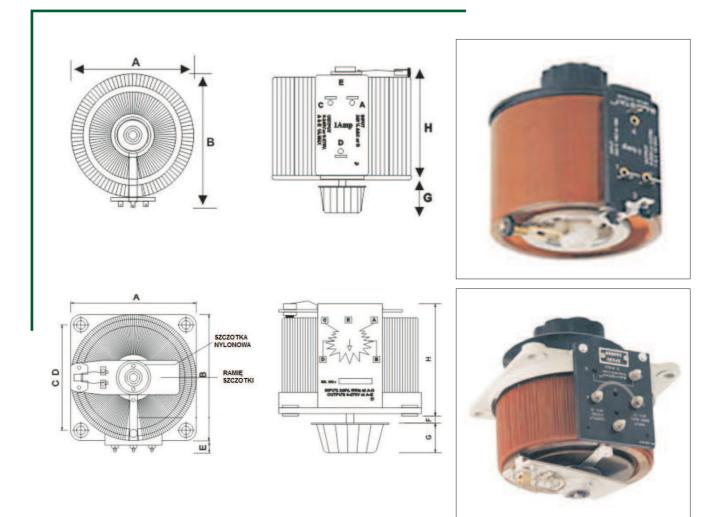

Туре	Nr	Current [VA]			Dimensions							Weight
	Art.	1	Imax	Α	В	C/D	E	F	G	н	ø	kg
OIEA 1	9854-0027	1,0	1,0	83	99				25	75		1,60
OIEA 3	9854-0028	2,8	3,0	110	110	92	10	6	25	75	7,5	3,30
OIEA 6	9854-0029	5,0	6,0	175	175	146	25	6	35	110	10	6,80
OIEA 8	9854-0030	6,5	8,0	175	175	146	25	6	35	130	10	8,00
OIEA 15	9854-0031	12,0	15,0	225	225	176	25	10	35	135	10	13,50

Because of the constant development of product construction and changes concerning technical requirements, Breve-Tufvassons Company reserves the right to change the parameters mentioned above.

11-02



OIEA

CE

ROHS