

Materials & Finish:

Insulator: Glass filled Nylon 9T UL 94V-0

Contacts: Brass

Shell: Steel

Shell plating: 50µ" Nickel over 100µ" Cu

Ordering Code:

CU01 P A H 1 000
 ① ② ③ ④ ⑤ ⑥

① Series No.

② P = Plug

③ Plating option:






A = Selective Gold flash plated over 1.27µm(50µ") Nickel

C = Selective 0.76µm(30µ") Gold plated over 1.27µm(50µ") Nickel

④ H = Right angle

⑤ Insulator Color: 1 = Black, 0 = White


⑥ Option: 000 = Standard

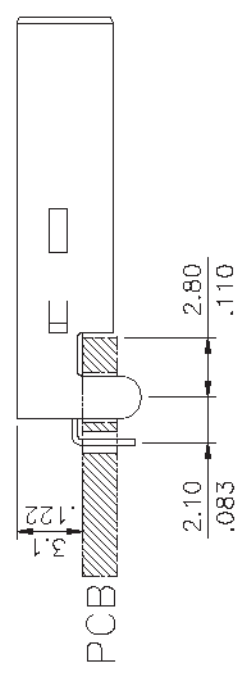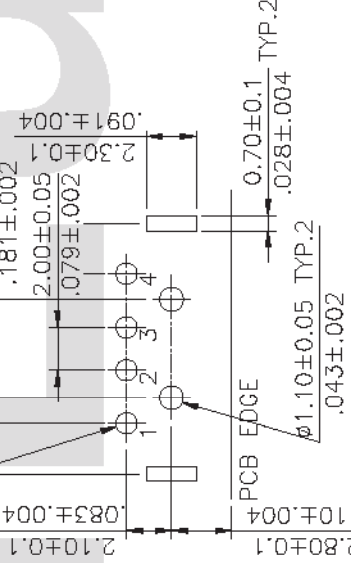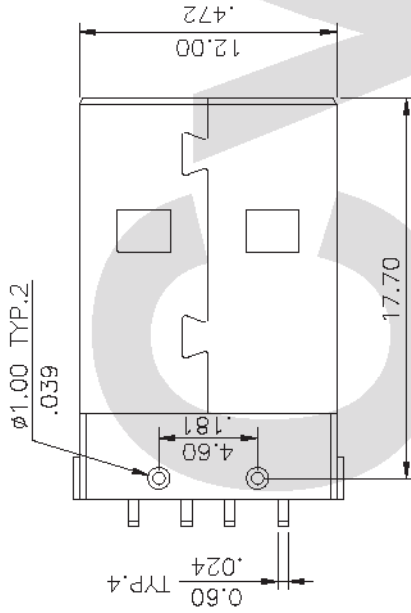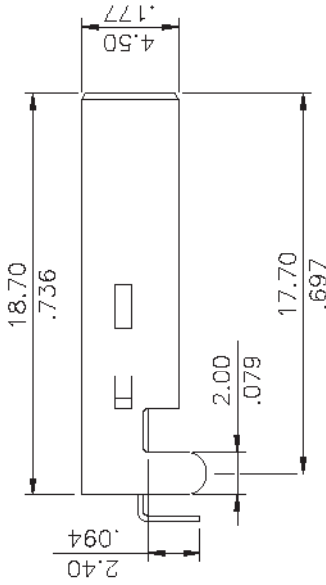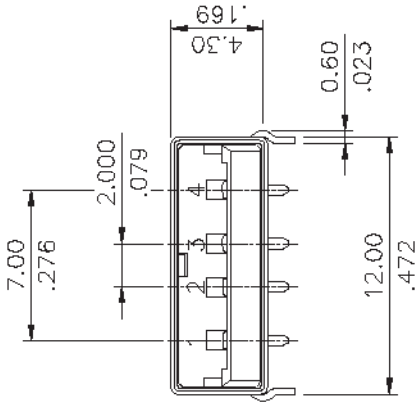

Recommended P.C. Board Layout



SYM	NAME	DATE	REVISIONS	DATE	DATE	UNIT: mm / inch	TITLE: USB TYPE A DIP TYPE BOARD MOUNT PLUG
4							
3							
2	Hank	11/8/06'		Hank	11/8-06'	UNLESS OTHERWISE SPECIFIED	
1	Sandy	12/28/04'		Eisley	11/9-06'	X ± 0.30/.012 X' ± 1"	MATERIAL:
				David	11/9-06'	XX ± 0.20/.008 X' ±	FINISH:
				Alex	11/9-06'	XXX ± 0.10/.004 XX' ±	

 瀚荃股份有限公司 CvILux Corporation		RoHS Compliant	
DRAWING NO.	CU0107SE	PART NO.	CU01P**H*000
SCALE	3 / 1	SHEET	1 OF 1