

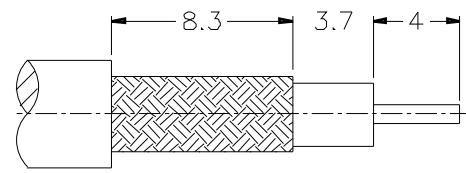
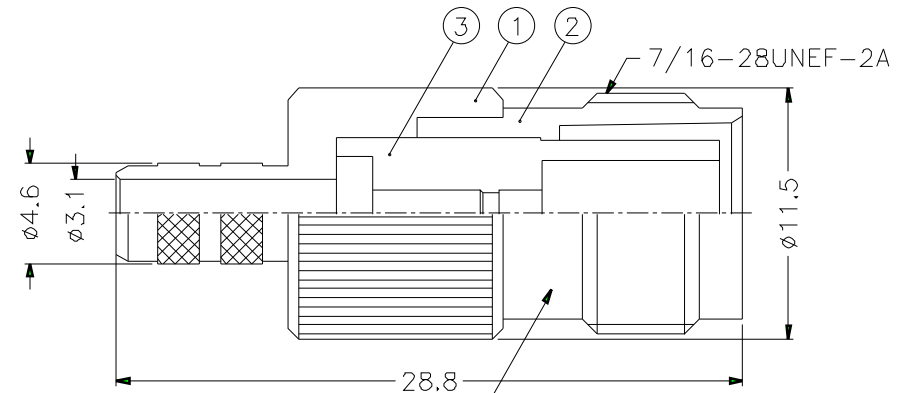


1			2			3			4			5			6			7			8		
REVISIONS																							
ISS	ZONE	DESCRIPTION\PER REQUES\DATE																					

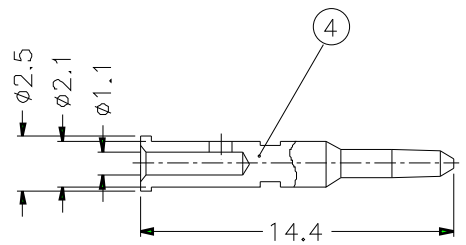

RECOMMENDED  
CABLE STRIPPING DIM'S

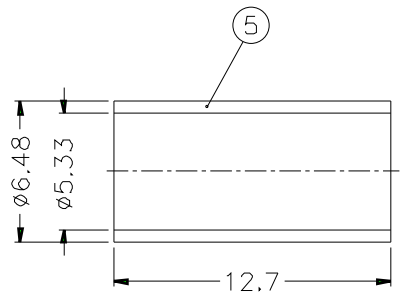

STAMP (IF ANY)

- 1. CRIMPED FERRULE  
HEX CRIMP SIZE .213"
- 2. CRIMPED CONTACT PIN  
HEX CRIMP SIZE .068"

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
 1. BRASS PER QQ-B-626  
 2. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 4. TEFLON MIL-P-19468

DIMENSIONS ARE IN MILLIMETERS						PART NO. RT6121A1-NT3G-1-50			<h1 style="margin: 0;">Amphenol</h1> <p style="margin: 0;">TITLE TNC REVERSE POLARITY CRIMP JACK</p> <p style="margin: 0;">DRAWING NO. KJ-RT6121A1-NT3G-58CU-50</p> <p style="margin: 0;">ITEM NO.</p>								
UNLESS OTHERWISE SPECIFIED TOLERANCES						APPROVED									DATE		
0.5-6 = ±0.2						CHECKED									DATE		
6-30 = ±0.4						DRAWN									DATE		
30-120 = ±0.6						SCALE			3/1			ISSUE			A		
120-315 = ±1						FILE NO.											
315-1000 = ±1.6																	
1000-2000 = ±2.4																	

5	FERRULE	COPPER	NOTE 2	1	FR-648/533X 127C
4	CONTACT PIN	NOTE 1	NOTE 2	1	RT6121A1-4-25 /11-B
3	INSULATOR	NOTE 4	NATURAL	1	RT6121A1-3T-50
2	BODY	NOTE 1	NOTE 2	1	RT6421G1-2
1	HOUSING	NOTE 1	NOTE 2	1	B70000-1-46/31
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.