

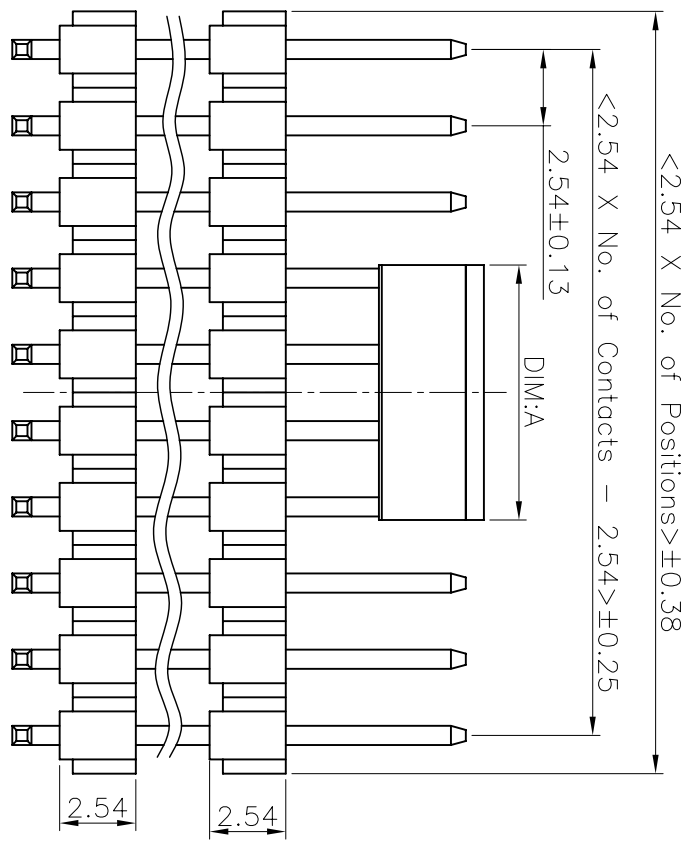
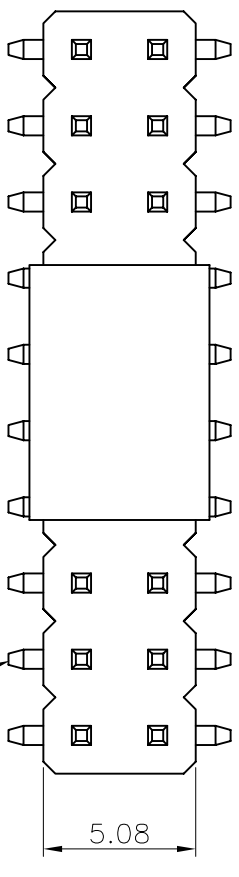


REV.	LOCALS.	DESCRIPTION	DATE	DRAWN
A		INITIAL RELEASE	2007.03.26	皮洪斌
01		轉量產版	2007.03.27	皮洪斌

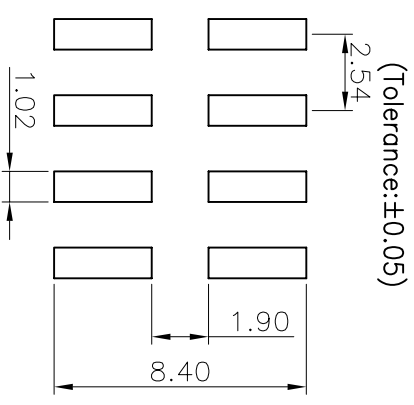

DIM:A	NOTE
5mm	02~08pins
8.50mm	09~40pins

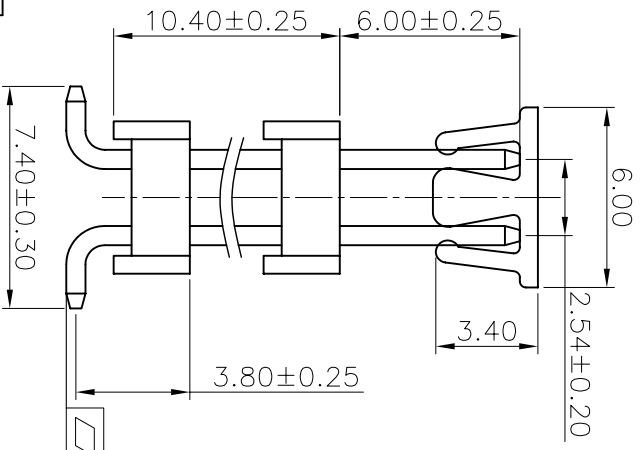

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Brass
 Insulator Material: Polyester, UL94V-0
 Nylon 6T

All materials must be GP materials

Ordering Information

No. of Pins per Row: 02-40

Contract Plating: 01=Fin, 02=Gold Flash Standard, Duplex plating, 03=Gold Flash/Tin

Options: P=CAP, T=TRR, PT=CAP+TRR

Recommended P.C.Board Layout

格菱股份有限公司
 Greenconn Corporation

REV.	UNIT.	SCALE.	PAGE.
01	mm	5:1	1/1

GENERAL TOLERANCE	
X' ± 5"	X. ± 0.30
X' ± 2"	X. ± 0.20
.XX' ± 1"	.XX. ± 0.15
.XXX' ± 0.5"	.XXX. ± 0.10

DESIGN:	皮洪斌
CHECKED:	
AUDITED:	
APPROVED:	

DATE:	2007.03.27
DATE:	
DATE:	
DATE:	

DWG. NO.	G PHC211-C01
PART NO.	G PHC211-XX XX C 01 - X

TITLE: 2.54 PIN HEADER
 DUAL ROWS SMT TYPE
 BASE 2.54H